



3003 S. Kinnickinnic Ave. 3rd Floor • Bay View, WI 53207
Phone 414.294.0900 • Cell 414.699.8859
www.creativelandscapedesignswi.com • Lynn@creativelandscapedesignswi.com

**INFORMATION REGARDING THE PILLARS AND WALLS
FOR
THE HUDAK LANDSCAPING PROJECT**


THE PILLARS FOR THE PERGOLA WILL GO DOWN TO A 4' FROST FOOTING
2' OUT FROM THE HOUSE, A 2" RIGID FOAM BOARD WILL BE INSTALLED FOR
PROTECTION FOR THE HOUSE FOOTINGS

GEOGRID WILL BE INSTALLED IN THE CONSTRUCTION OF THE WALL

THERE WILL BE FOOTINGS ON BOTH SIDES OF THE STEPS

A 4' DRAIN WILL BE INSTALLED AT THE BOTTOM OF THE STAIRS


RAFFINATO PILLARS WITH YORK CAP
AND WALL

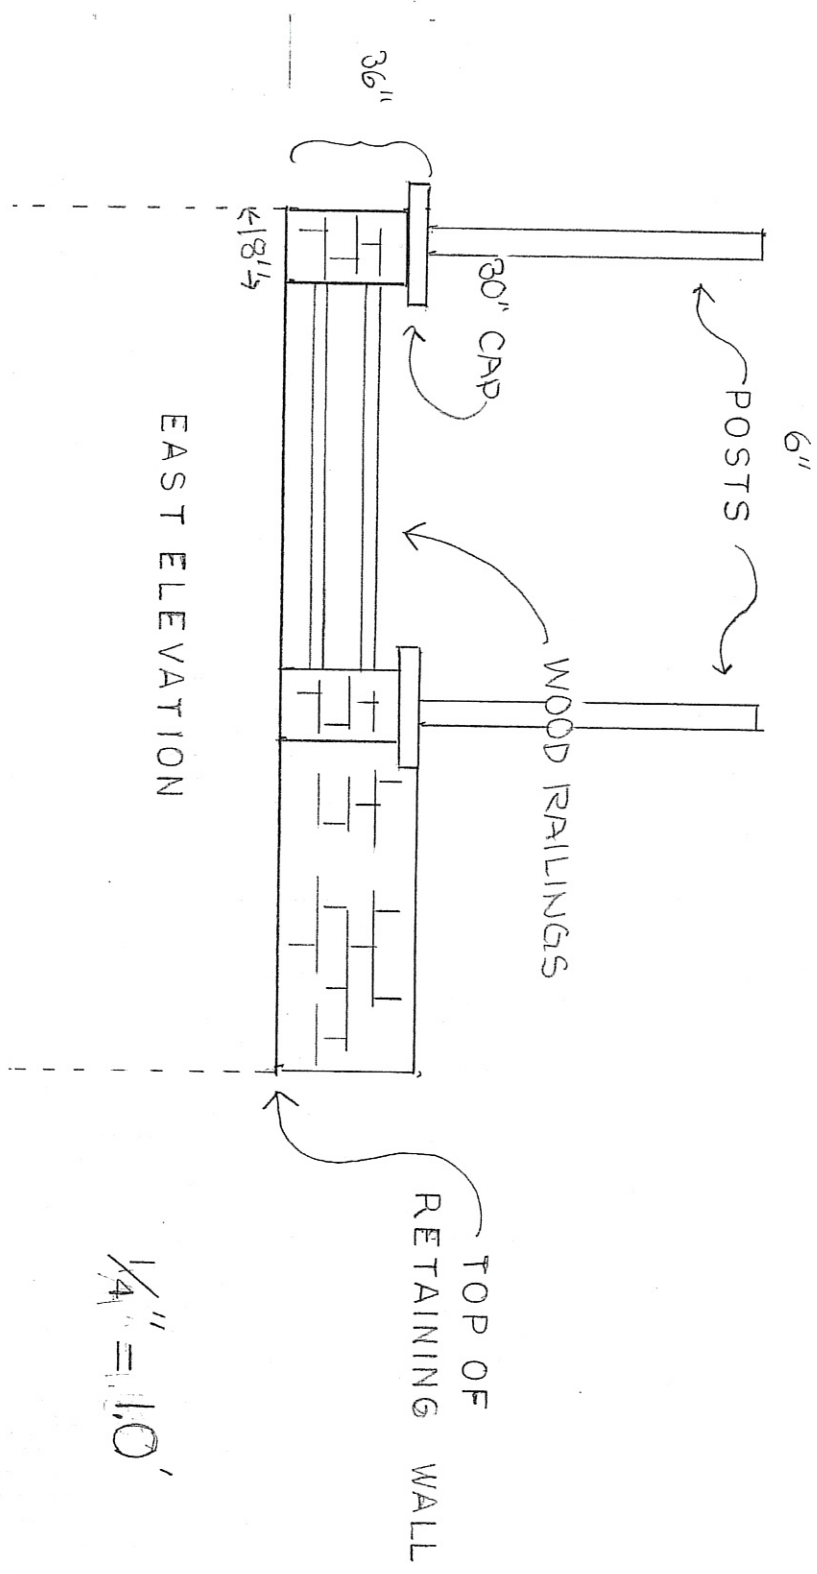

1/4" = 1.0'

L. GOLDSTEIN
a/8/18

RAFFINATO PILLARS WITH
YORK CAP

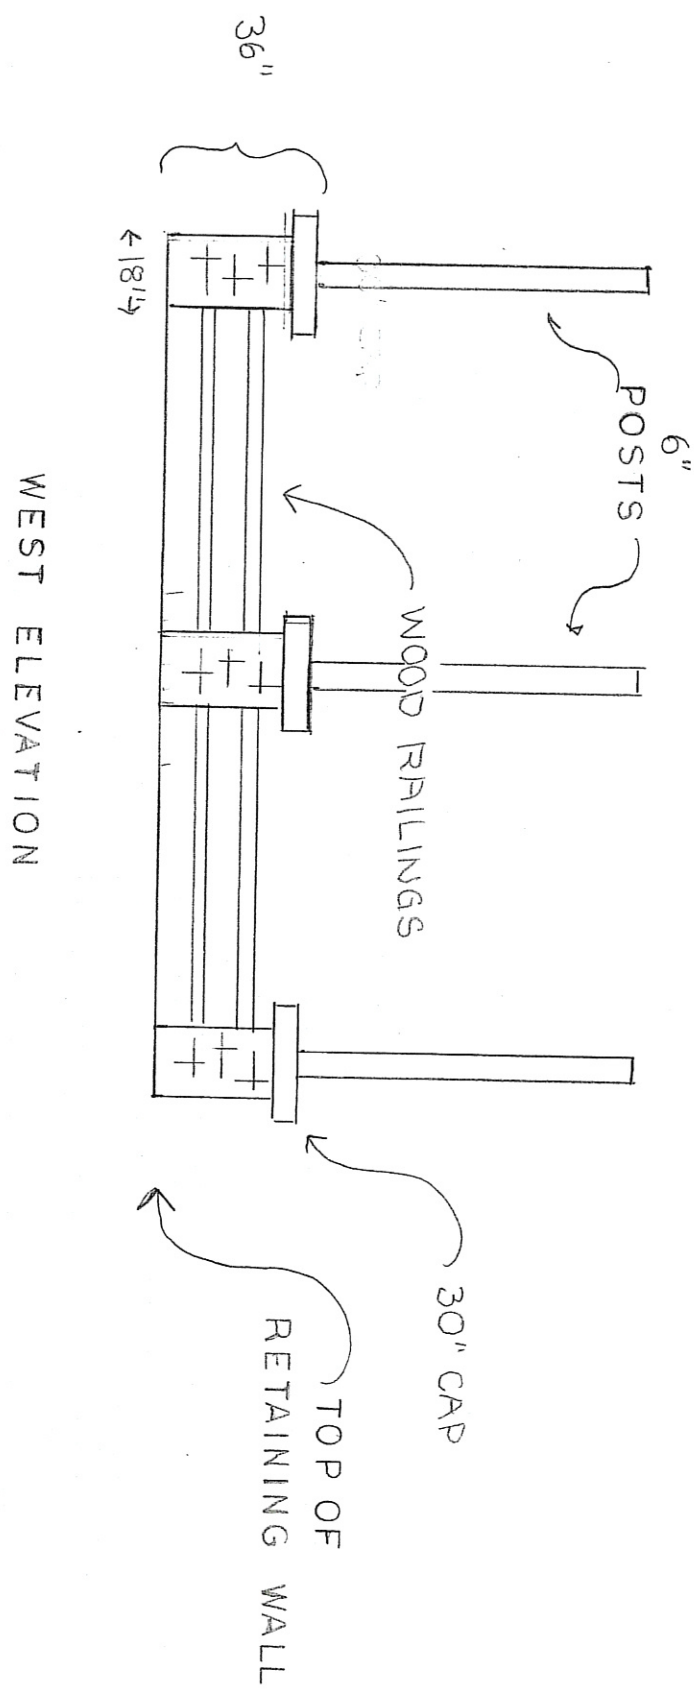

L. GOLDSTEIN
2/8/18